


LED Down Light - 04

Data Specification:




Performance & parameter of product

Model No.	Part Number	OT0460-20W	OT0480-30W
Structure parameter	Dimension	Φ190*68mm	Φ230*68mm
	Cut-out	Φ175mm	Φ215mm
Performance parameter	Lamp	Warm white/Natural white/Cool white	
	Lumen (lm)	1800lm/1900lm/2100lm	
	Color temperature (K)	3000K/4200K/6500K	
	CRI	≥70	
	Type of LED	COB LED	
	Beam angle	99°	102°
	Decay rate (%)	less than 3% within 1000 working hours	
	Total power (W)	31-34W	
	Lifespan (Hrs)	≥30000Hrs	
	High voltage testing	1750Vac/1min	
LED parameter	Lighting efficiency	100LM/W	
	Chip quantity	144PCS	
	series-parallel way	12S12P	
	Voltage	37-39VDC	
	Current	830mA	
Driver parameter	Input parameter	100~240VAC · 50/60Hz	
	Power factor	0.9	
	Output parameter	24-42VDC,550mA	26-42VDC,830mA
Structure parameter	Material	Cast-Aluminium	
	Protection class	class I	
	Ingress Protection	IP20	
Environment parameter	Application	Hotel,Home-lighting,Recreation place,Supermarket,Office building.	
	Operating temperature	-25℃ ~ 50℃ · 10% ~ 90% R.H.	
	Storage temperature	-30℃ ~ 85℃ · 0% ~ 95% R.H.	
Packing specification	Qty/Ctn	Carton Size	
	20PCS/Ctn	48.5x45.5x49 cm	56.5x52.5x20.5 cm



OT0460-20W

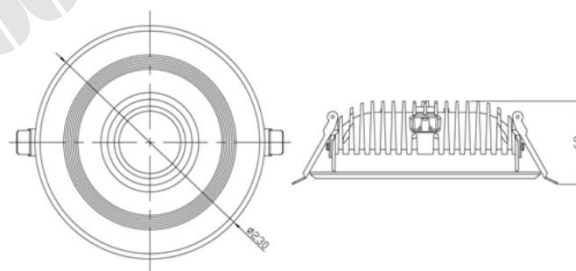

OT0480-30W

* Others data not in the specification of data, please contact us.

如果你要求的規格參數不在本規格書裡表現出來請與我們聯絡。