

LED U

LED U

, 03 2021 03:53 - , 29 2022 07:32

T5 T8 LED

SINLOON® LED U

LED Batten Single/Double-barreled



Data: [U](#)

Body Fixtures: Figure:

The chassis uses high quality acid packing,



The product has been static electricity spray painted with environmental power. It can be resistant to rust.

The service life of LED tube can be 50000hrs. The way of power supply AC input double and version.

The voltage is AC110V-277V

Describe of the lighting fixture:

/

LED U

LED U

, 03 2021 03:53 - , 29 2022 07:32

		L	W
U-T8-LED061009x1	T8	2FT9W	600
U-T8-LED121009x1	T8	4FT18W	1200
U-T8-LED151009x1	T8	5FT22W	1500
U-T8-LED061706x2	T8	2FT18W	650

LED U



LED U

, 03 2021 03:53 - , 29 2022 07:32

U-T8-LED121706x2	T8	4FT36W	1250
U-T8-LED151706x2	T8	5FT44W	1550

Metal material thick: ~1.2mm


: .

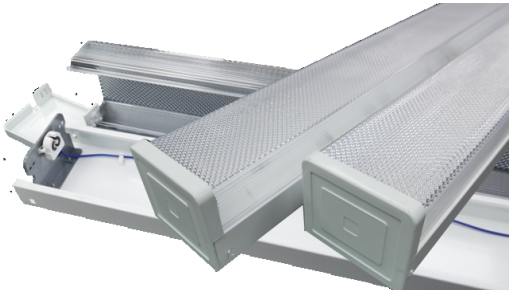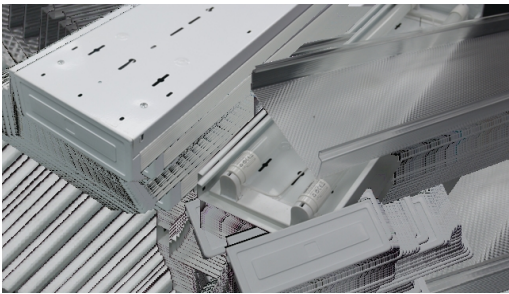

LED U

LED U

, 03 2021 03:53 - , 29 2022 07:32

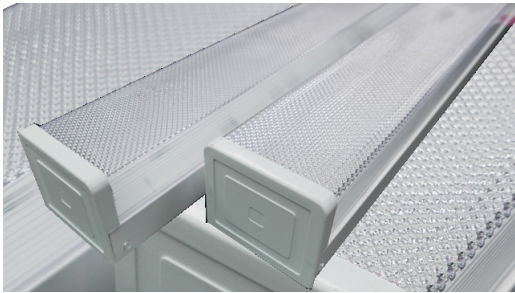

: (T5/T8)

: , , , , , .

Applying: Industrial factory buildings, underground packing lots, schools, shopping malls.

:
 ,
 ,
 ,
 ,
 PC ,

90 ,

LED U

LED U

, 03 2021 03:53 - , 29 2022 07:32

, ,

