

**SINLOON®**

閉磁式功率電感  
Inductance Range: 1.2 $\mu$ H ~ 47 $\mu$ H

TYPE: RH3D-A Series  
SMT Shielded Power Inductors

SMT Shielded Power Inductors

Part No.	Inductance Range:
RH3D11A	2.7 $\mu$ H ~ 39 $\mu$ H
RH3D16A	1.5 $\mu$ H ~ 33 $\mu$ H
RH3D28A	3.3 $\mu$ H ~ 47 $\mu$ H
RH3D14ALD	1.2 $\mu$ H ~ 47 $\mu$ H
RH3D14AHF	1.5 $\mu$ H ~ 22 $\mu$ H
RH3D28ALD	10 $\mu$ H ~ 220 $\mu$ H

□ Figure



□ Feature

- ◆ Magnetically shielded construction (閉磁路構造設計)
- ◆ Compact and thin (輕便薄小)
- ◆ Large Current and Low DCR (大電流低直流阻抗)

□ Applications

- ◆ DC-DC converter of portable equipment. (攜帶機器之直流轉換器)
- ◆ Camcorder, LCD television set, Digital camera, P.D.A., Notebook. (攝影機、液晶電視、數位相機、P.D.A.、筆記型電腦)

□ Ordering

Product Identification of Part Number  
Type: Ex. RH3D11A-2R7N  
\* See Product Part of Number  
Tolerance:  
K  $\pm$ 10%; L  $\pm$ 15%; M  $\pm$ 20%; N  $\pm$ 30%


□ Configurations & Dimension

Unit:mm

TYPE	A (max)	B (max)	C (max)	D (max)	E (ref.)	F	G	H	Reel Tape Package	
									$\Phi$ 178	$\Phi$ 330
RH3D11A	4.0	4.0	1.2	5.2	1.0	1.3	1.4	2.4	1500 pcs	5000 pcs
RH3D14ALD	4.0	4.0	1.5	5.2	1.0	1.3	1.4	2.4	1500 pcs	5000 pcs
RH3D14AHF	4.0	4.0	1.5	5.2	1.0	1.3	1.4	2.4	---	3000 pcs
RH3D16A	4.0	4.0	1.8	5.2	1.0	1.3	1.4	2.4	---	3000 pcs
RH3D28A	4.0	4.0	3.0	5.2	1.0	1.3	1.4	2.4	---	3000 pcs
RH3D28ALD	4.0	4.0	3.0	5.2	1.0	1.3	1.4	2.4	---	3000 pcs

※Design as Customers Requested Specifications (可依特殊需求設計生產)

□ Reel Type Dimension

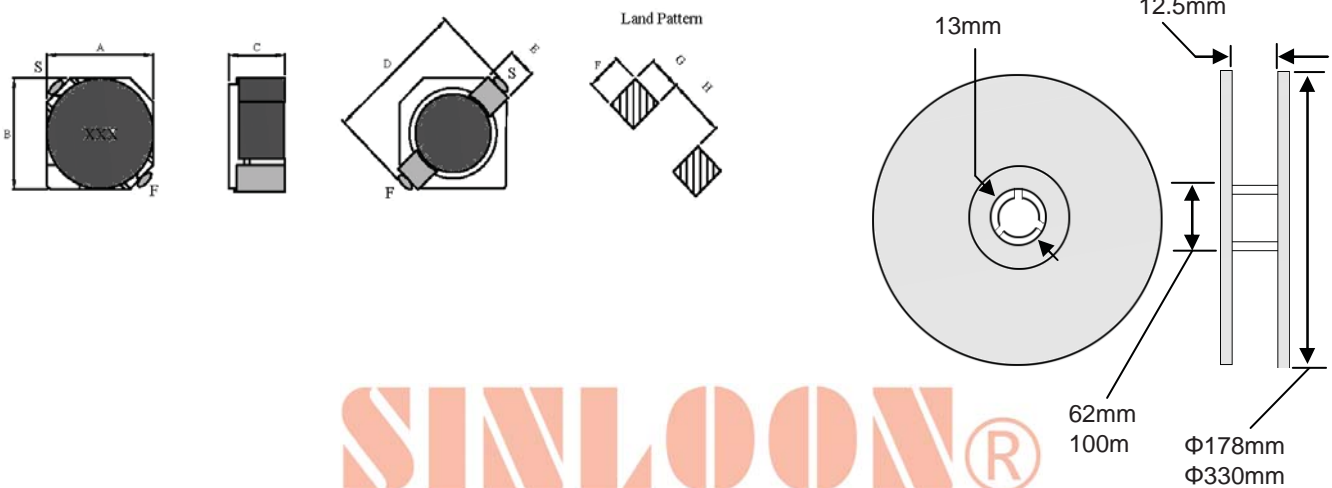

**SINLOON®**

※美隆公司產品規格及其特性參數的改變或更新恕不另行通知。

※Mayloon characteristic parameters of electronic product specification changes or updates without notice to improve



□ Electrical Characteristics for RH3D11A Series

產品規格型號 Ordering Part Number	電感值(L) Inductance (μH)	測試頻率 Test Freq. (KHz)	直流阻抗 DCR (Ω) (max)	定格電流 Isat (A) (max)	溫升電流 Irms(A) (max)	字碼 Marking Code
RH3D11A-2R7N	2.70	100	0.078	0.53	1.82	U
RH3D11A-4R7N	4.70	100	0.123	0.40	1.38	E
RH3D11A-6R8N	6.80	100	0.180	0.34	1.05	F
RH3D11A-8R2N	8.20	100	0.204	0.32	0.95	V
RH3D11A-100M	10.0	100	0.240	0.28	0.90	G
RH3D11A-120M	12.0	100	0.276	0.25	0.81	H
RH3D11A-150M	15.0	100	0.372	0.23	0.68	I
RH3D11A-180M	18.0	100	0.468	0.21	0.58	J
RH3D11A-220M	22.0	100	0.540	0.19	0.53	K
RH3D11A-270M	27.0	100	0.726	0.17	0.48	L
RH3D11A-330M	33.0	100	0.822	0.15	0.41	M
RH3D11A-390M	39.0	100	0.942	0.14	0.40	N



- ※ Test Frequency: 1000Kz / 0.1V
- ※ Operating Temperature: -40°C ~ +85°C
- ※ Inductance drop : 35% typ at Isat.
- ※ ΔT : 40°C rise at Irms.

□ Electrical Characteristics for RH3D14ALD Series

產品規格型號 Ordering Part Number	電感值(L) Inductance (μH)	測試頻率 Test Freq. (KHz)	直流阻抗 DCR (Ω) (max)	定格電流 Isat (A) (max)	溫升電流 Irms(A) (max)	字碼 Marking Code
RH3D14ADL-1R2N	1.2	100	0.0380	1.50	2.70	LA
RH3D14ADL-1R5N	1.5	100	0.0480	1.35	2.40	LB
RH3D14ADL-2R2N	2.2	100	0.0550	1.15	2.20	LC
RH3D14ADL-2R7N	2.7	100	0.0680	1.05	1.90	LD
RH3D14ADL-3R3N	3.3	100	0.0770	0.95	1.60	LE
RH3D14ADL-3R9N	3.9	100	0.0960	0.80	1.50	LF
RH3D14ADL-4R7N	4.7	100	0.1050	0.75	1.45	LG
RH3D14ADL-5R6N	5.6	100	0.1590	0.70	1.10	LH
RH3D14ADL-6R8N	6.8	100	0.1730	0.60	1.05	LI
RH3D14ADL-8R2N	8.2	100	0.1750	0.52	1.00	LJ
RH3D14ADL-100M	10.0	100	0.2200	0.50	1.00	LK
RH3D14ADL-120M	12.0	100	0.2700	0.45	0.80	LL
RH3D14ADL-150M	15.0	100	0.3020	0.40	0.75	LM
RH3D14ADL-220M	22.0	100	0.4470	0.35	1.60	LO
RH3D14ADL-330M	33.0	100	0.8480	0.30	0.40	LQ
RH3D14ADL-470M	47.0	100	1.0800	0.25	0.35	LS

- ※ Test Frequency: 1000Kz / 0.1V
- ※ Operating Temperature: -40°C ~ +85°C
- ※ Inductance drop : 35% typ at Isat.
- ※ ΔT : 40°C rise at Irms.

□ Electrical Characteristics for RH3D14HP Series

產品規格型號 Ordering Part Number	電感值(L) Inductance (μH)	測試頻率 Test Freq. (KHz)	直流阻抗 DCR (Ω) (max)	定格電流 Isat (A) (max)	溫升電流 Irms(A) (max)	字碼 Marking Code
RH3D14AHP-1R5N	1.5	100	0.076	2.600	1.85	HB
RH3D14AHP-2R4N	2.4	100	0.129	2.000	1.32	HC
RH3D14AHP-3R2N	3.2	100	0.139	1.800	1.25	HE
RH3D14AHP-4R7N	4.7	100	0.214	1.450	1.04	HG
RH3D14AHP-6R8N	6.8	100	0.290	1.200	0.84	HH
RH3D14AHP-100M	10	100	0.440	1.000	0.67	HJ
RH3D14AHP-150M	15	100	0.650	0.800	0.50	HL
RH3D14AHP-220M	22	100	0.830	0.650	0.48	HN

- ※ Test Frequency: 1000Kz / 0.1V
- ※ Operating Temperature: -40°C ~ +85°C
- ※ Inductance drop : 35% typ at Isat.
- ※ ΔT : 40°C rise at Irms.
- ※ Design as Customers Requested Specifications (可依特殊需求設計生產)



□ Electrical Characteristics for RH3D16A Series

產品規格型號 Ordering Part Number	電感值(L) Inductance (μH)	測試頻率 Test Freq. (KHz)	直流阻抗 DCR (Ω) (max)	定格電流 Isa (A) (max)	字碼 Marking Code
RH3D16A-1R5N	1.5	100	0.052	1.550	1R5
RH3D16A-2R2N	2.2	100	0.072	1.200	2R2
RH3D16A-3R3N	3.3	100	0.085	1.100	3R3
RH3D16A-4R7N	4.7	100	0.105	0.900	4R7
RH3D16A-6R8N	6.8	100	0.170	0.730	6R8
RH3D16A-100N	10	100	0.210	0.550	100
RH3D16A-150N	15	100	0.295	0.450	150
RH3D16A-220N	22	100	0.430	0.400	220
RH3D16A-330N	33	100	0.675	0.320	330



- ※ Test Frequency: 1000Kz / 0.1V
- ※ Operating Temperature: -40°C ~ +85°C
- ※ Inductance drop : 35% typ at Isat.

□ Electrical Characteristics for RH3D28 Series

產品規格型號 Ordering Part Number	電感值(L) Inductance (μH)	測試頻率 Test Freq. (KHz)	直流阻抗 DCR (Ω) (max)	定格電流 Isat (A) (max)	溫升電流 Irms(A) (max)	字碼 Marking Code
RH3D28A-3R3N	3.3	100	0.0721	2.000	1.85	D
RH3D28A-4R7N	4.7	100	0.0883	1.650	1.62	E
RH3D28A-6R8N	6.8	100	0.1190	1.240	1.32	F
RH3D28A-100M	10	100	0.1450	1.050	1.18	G
RH3D28A-150M	15	100	0.2130	0.900	1.02	I
RH3D28A-220M	22	100	0.3350	0.760	0.74	K
RH3D28A-330M	33	100	0.4810	0.580	0.63	M
RH3D28-470M	47	100	0.5990	0.480	0.56	O

- ※ Design as Customers Requested Specifications (可依特殊需求設計生產)
- ※ Test Frequency: 1000Kz / 0.1V
- ※ Operating Temperature: -40°C ~ +85°C
- ※ Inductance drop : 35% typ at Isat.
- ※ ΔT : 40°C rise at Irms.

□ Electrical Characteristics for RH3D28ALD Series

產品規格型號 Ordering Part Number	電感值(L) Inductance (μH)	測試頻率 Test Freq. (KHz)	直流阻抗 DCR (Ω) (max)	定格電流 Isat (A) (max)	溫升電流 Irms(A) (max)	字碼 Marking Code
RH3D28ALD-100M	10.0	100	0.0950	0.500	1.52	LG
RH3D28ALD-120M	12.0	100	0.1000	0.450	1.48	LH
RH3D28ALD-150M	15.0	100	0.1150	0.400	1.44	LI
RH3D28ALD-180M	18.0	100	0.1250	0.350	1.37	LJ
RH3D28ALD-220M	20.0	100	0.1450	0.330	1.28	LK
RH3D28ALD-270M	27.0	100	0.1750	0.290	1.18	LL
RH3D28ALD-330M	33.0	100	0.2150	0.280	1.15	LM
RH3D28ALD-390M	39.0	100	0.2250	0.250	1.00	LN
RH3D28ALD-470M	47.0	100	0.3050	0.230	0.81	LO
RH3D28ALD-560M	56.0	100	0.3250	0.200	0.76	LP
RH3D28ALD-680M	68.0	100	0.4700	0.185	0.60	LQ
RH3D28ALD-820M	82.0	100	0.5400	0.172	0.58	LR
RH3D28ALD-101M	100.0	100	0.6100	0.160	0.52	LS
RH3D28ALD-121M	120.0	100	0.7550	0.136	0.50	LT
RH3D28ALD-151M	150.0	100	0.8800	0.124	0.48	LU
RH3D28ALD-181M	180.0	100	1.1300	0.119	0.42	LV
RH3D28ALD-221M	220.0	100	1.2700	0.116	0.36	LW

- ※ Design as Customers Requested Specifications (可依特殊需求設計生產)
- ※ Operating Temperature: -40°C ~ +85°C
- ※ Inductance drop : 35% typ at Isat.
- ※ ΔT : 40°C rise at Irms.
- ※美隆公司產品規格及其特性參數的改變或更新恕不另行通知。
- ※Mayloon characteristic parameters of electronic product specification changes or updates without notice to improve