

SINLOON®

肖特基二極管
Case: ITO-220

SB820FCT - SB8100FCT
10A Dual Schottky Barrier Rectifier

Feature

- ◆ Schottky Barrier Chip
- ◆ Guard Ring for Transient Protection
- ◆ Low Forward Voltage Drop
- ◆ Low Reverse Leakage Current
- ◆ High Surge Current Capability
- ◆ Plastic Material has UL Flammability Classification 94V-0


Figure



Mechanical Data

- ◆ Case: ITO-220, Full Moldes Plastic
- ◆ Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- ◆ Polarity: See Diagram
- ◆ Weight: 2.24 grams (approx)
- ◆ Mounting Position: Any
- ◆ Mounting Torque: 11.5 cm·kg (10 in·lbs) max.
- ◆ Lead Free: For **RoHS** / Lead Free Version Add "-LF" Suffix to part Number.


Electrical Symbol

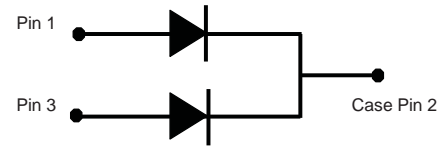

Dimension


Case: ITO-220 (mm)

Dim.	Min.	Max.
A	14.6	15.4
B	9.7	10.3
C	2.55	2.85
D	2.7	3.3
E	13.0	13.8
F	0.5	0.75
G (Φ)	3.0	3.5
H	6.3	6.9
I	4.2	4.8
J	2.5	2.9
K	0.5	0.75
L	2.7	3.15
P	2.29	2.79

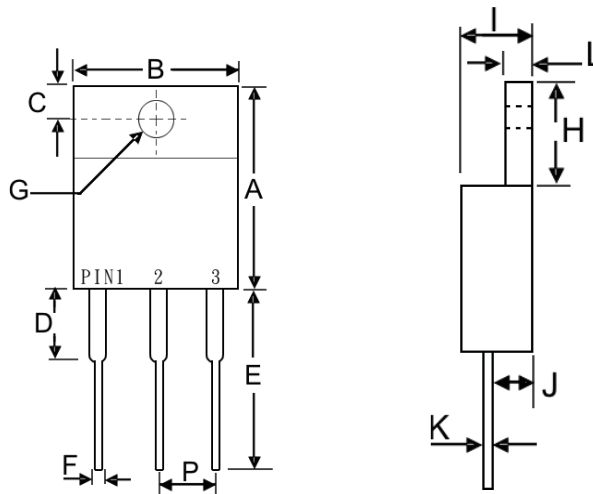

Marking Information

- SB8xxFCT = Device Number
- xx = See Page 2
- Polarity = As Marked Body

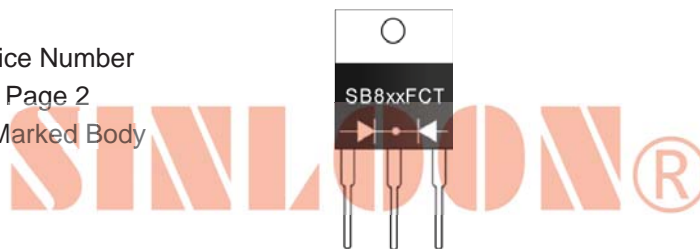

SINLOON®

肖特基二極管
Case: ITO-220





SB820FCT - SB8100FCT
10A Dual Schottky Barrier Rectifier

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load For capacitive load, derate current by 20%.

Characteristics	Symbol	SB	SB	SB	SB	SB	SB	SB	SB	Unit
		820FCT	830FCT	840FCT	845FCT	850FCT	860FCT	880FCT	8100FCT	
Peak Repetitive Reverse Voltage	V _{RRM}									V
Working Peak Reverse Voltage	V _{RWM}	20	30	40	45	50	60	80	100	V
DC Blocking Voltage	V _R									V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	32	35	42	56	70	V
Average Rectified Output Current	I _O	8.0		8.0			8.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC	I _{FSM}	150		150			150			A
Forward Voltage @I _F =4.0A	V _{FM}	0.55		0.75			0.85			V
Peak Reverse Current @T _A = 25°C	I _{RM}				0.5					mA
At Rated DC Blocking Vol. @T _A =100°C					50					
Typical Junction Capacitance (Note 1)	C _j				700					pF
Operating and Storage Temperature Range	T _j , T _{STG}				-65 to +150					°C

Note 1: Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

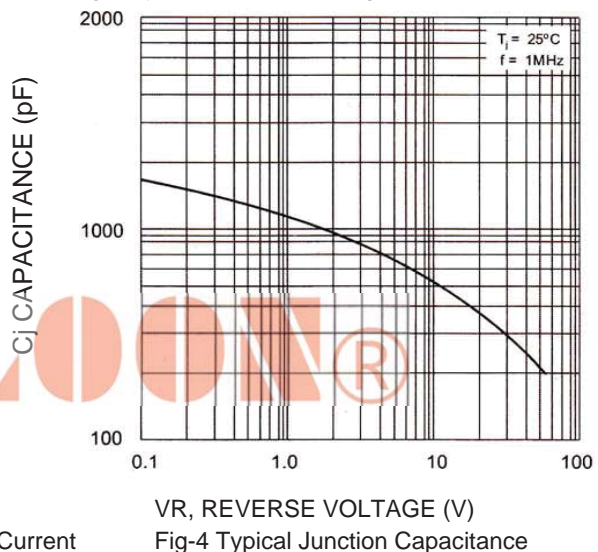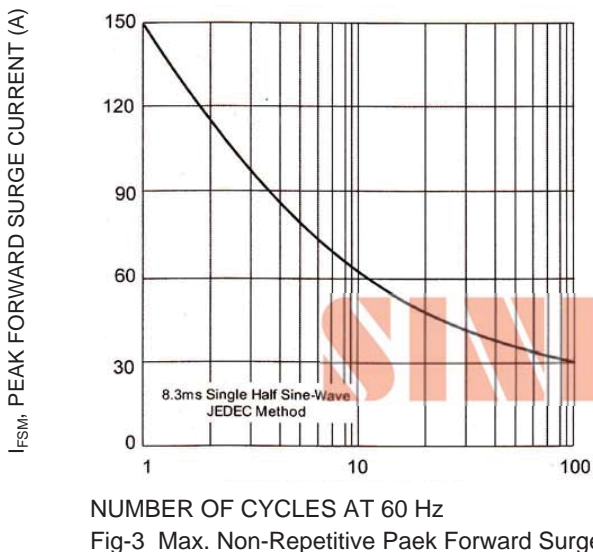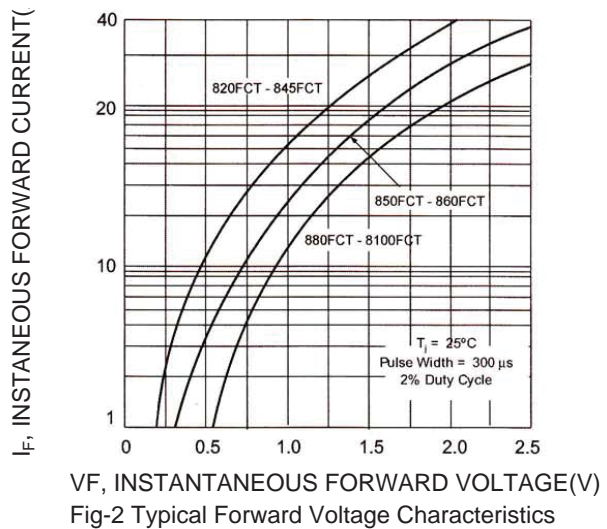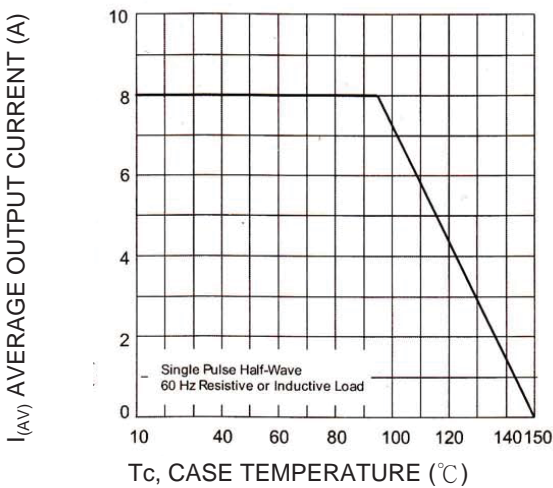

SINLOON®


肖特基二極管
Case: ITO-220

SB820FCT - SB8100FCT
10A Dual Schottky Barrier Rectifier


Packaging Information

Tube Size LxWxH (mm)	Quantity (Pcs)	Inner Box Size LxWxH (mm)	Quantity (Pcs)	Carton Size LxWxH (mm)	Quantity (Pcs)	Gross Weight
525 x 31 x 6	50	555x145x95	2000	572x306x218	8000	19.0kg

Anti-static tube:

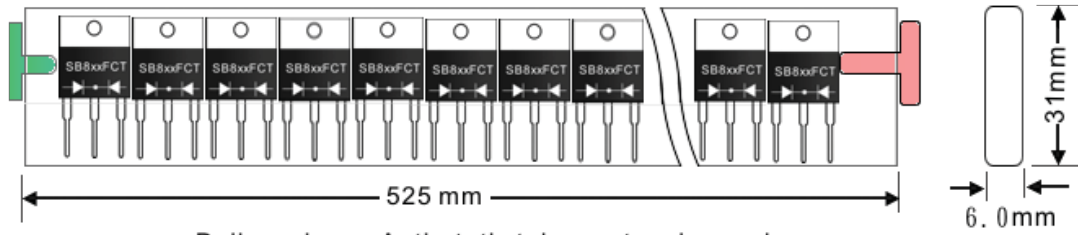

Inner Box :

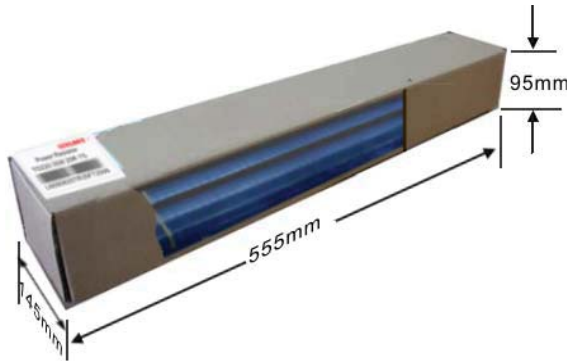


Carton Package:



□ Package Mounting Guide

It is important that the packages are correctly mounted if full functionality is to be achieved. Mounting of the package to a heat sink must be done such that there is sufficient pressure from the mounting screws to insure good contact with the heat sink for efficient heat flow. Incorrect mounting may lead to both thermal and mechanical problems. Over tightening the mounting screws will cause the package to warp reducing the contact area with the heat sink and increasing the thermal resistance from the package case to the heat sink, resulting in higher operating die temperatures. Extreme over tightening of the mounting screws beyond the recommended torque force will cause severe physical stress resulting in cracked die and catastrophic IC failure. Though the reliability of the package is excellent, the use of inappropriate techniques or unsuitable tools during the mounting process can affect the long term reliability of the device and even damage it.

□ Recommended Screw Mount Arrangement

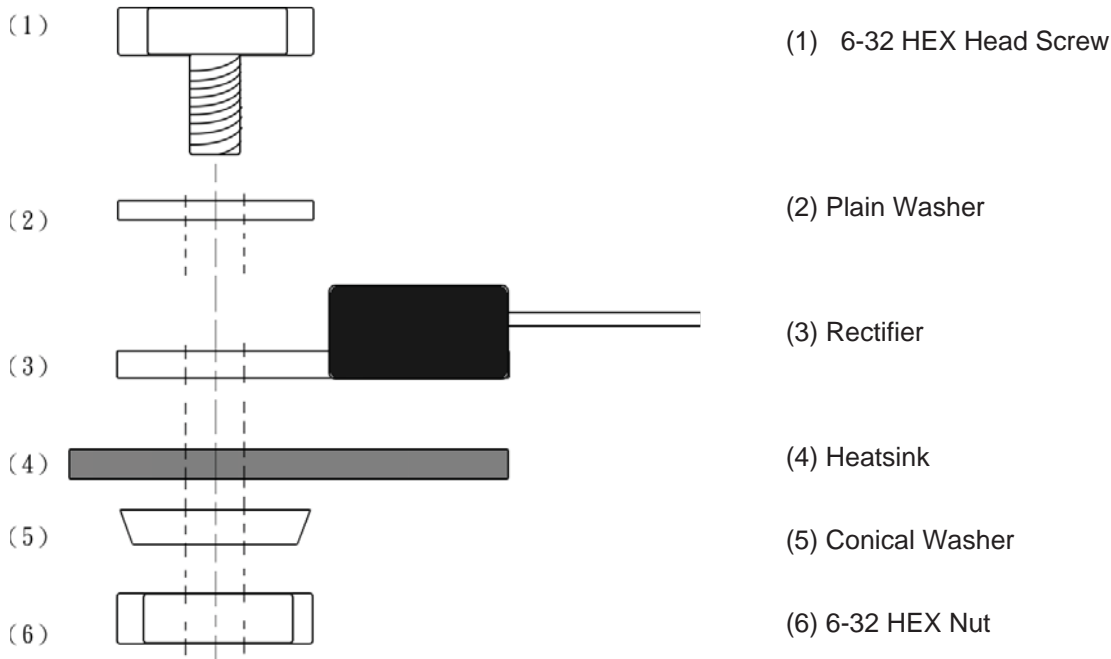

- ◆ The full molded plastic package affords a major reduction of hardware as compared to a standard TO-220 package. However, precaution should be made in mounting procedure.
- ◆ A conical washer should be used to apply proper force to the device. Screw should not be tightened with any type of air-forced torque or equipment that may cause crack on device package.
- ◆ A layer of thermal grease or thermal pad in the interface will be considerably helpful for heat dissipation.

※美隆公司產品規格及其特性參數的改變或更新恕不另行通知。

※Mayloon characteristic parameters of electronic product specification changes or updates without notice to improve。